


AIRBUS A380


Cut-Out

1. Carefully cut out body fuselage and tail piece along thick black lines, including the tail and fuselage slots.

2. Fold main body of plane along centre fold line.




3. Fold tail piece along dotted lines - centre fold first (downward), followed by lower tails (upward).

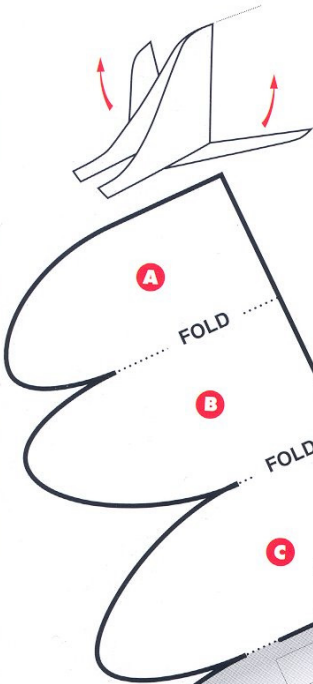

FLYING TIPS

- Hold plane behind wings and glide in a straight line.
- Improved performance can be gained through slight adjustment of wings and tail.
- Longer flying distances can be achieved by attaching a paper clip to the aircraft nose.

4. Whilst holding tail piece flat between finger and thumb, gently insert at a 45° angle into corresponding tail slots on fuselage body. Firmly pull up and back.



5. Fold flat parts **A**, **B** and **C** between the two sides of the plane (printed side out). Insert tab **D** into corresponding slot. Main body of plane should now be flat.



CAUTION

Do not throw at people, animals or breakable objects.



6. Straighten out wings and tail plane until level. Fold engines vertically down and winglets up.

